


8-Port Gigabit Ethernet Switch

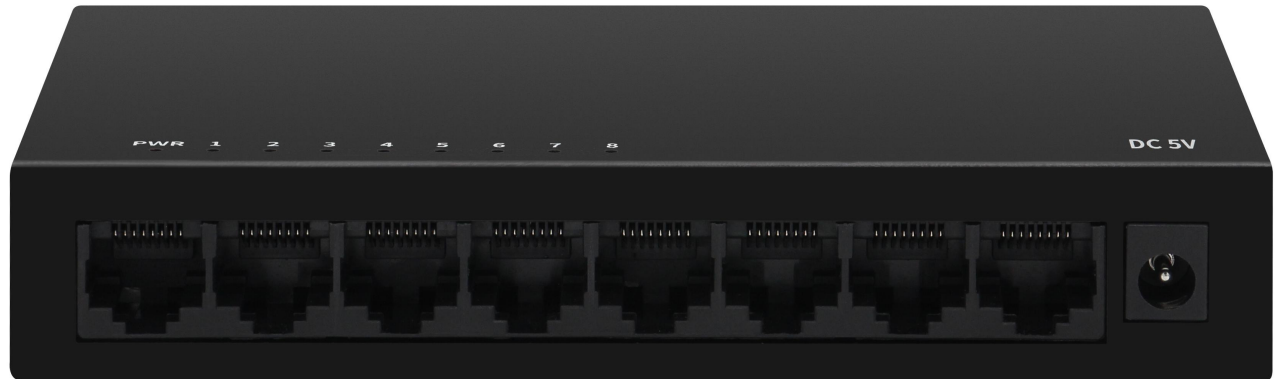

Product Highlights

- 8*1Gbps RJ45 ports
- Comply with IEEE802.3 and IEEE802.3u,IEEE802.3az,IEEE802.3ab standards
- Ethernet Ports support 10/100/1000M self-adaptive
- Supports automatic port flipping (Auto MDI/MDIX)
- The panel indicator LED will monitor the working status and assist in fault analysis
- Flow control method, IEEE802.3x standard for full duplex and Backpressure standard for half duplex

Hardware Features

Description	Specification
Model	EW-08G-5W-EP
Interface	8*1Gbps RJ45 ports
Port Standard	IEEE802.3 (Ethernet) IEEE802.3u (Fast Ethernet) IEEE802.3x (Flow Control) IEEE802.3ab (Gigabit Ethernet) IEEE802.3az(Energy Efficient Ethernet)
Switching Bandwidth	16Gbps
Packet Forwarding Rate	11.9Mpps
Packet Buffer	4Mbit
MAC Address Table	8K
Transmission Method	Store and Forward
Power Supply	AC 100-240V, 50/60Hz DC 5V 1A
Mainboard Power Consumption	3.77W
Structure Information	Product Dimensions: 138*78*25mm Packaging Dimensions: 175*120*63mm Product Net Weight: 0.24Kg Product Gross Weight: 0.37Kg
Packing Information	Carton Dimensions: 520*335*380mm Packing Quantity: 40PCS Packing Weight: 15.8KG
Package Contents	Switch 1pcs, Ac adapter 1pcs, Manual 1pcs, Certificate of Inspection 1pcs
Fan Quantity	0
Installation	Desktop
Surge Protection	Port Surge: Common mode 2KV, Differential mode 1KV (Class A) Electrostatic ESD: Air 4KV, contact 3KV (Class C)
Operating Temperature	0~40°C
Storage Temperature	-40~70°C
Operation Humidity	10%~90%, non condensing
Storage Humidity	5%~95%, non condensing
PWR Green LED	On: Powered on Off: Powered off
Ports 1-8 Green LED	On: Link normal Off: Link blocked Flashing: Data transmitting

Product Structure Diagram

